

Figure 1 - Left: A Selective Solar Absorber is installed in the calorimetric device. Right: The calorimetric device during the outdoor testing procedure

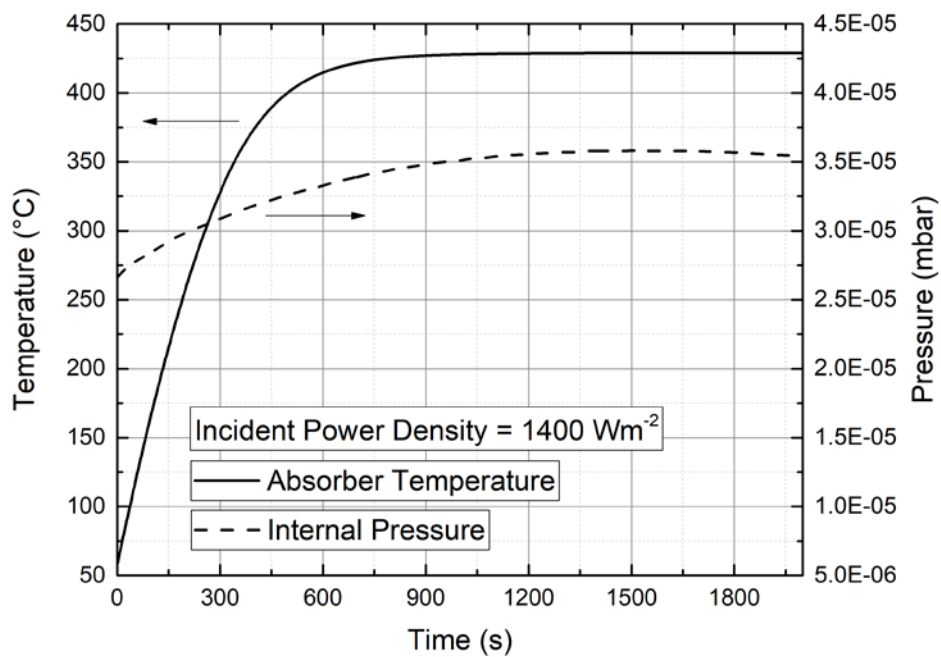


Figure 2 - The absorber temperature and the internal pressure during a calorimetric test are reported as function of time.